

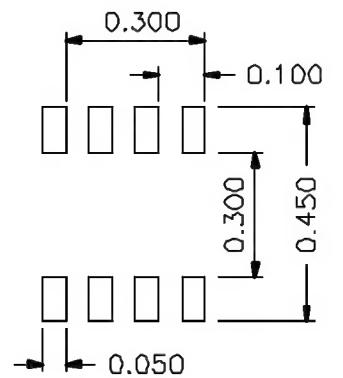
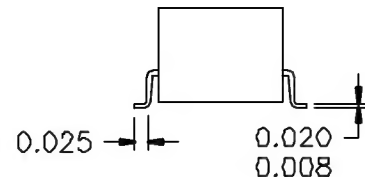
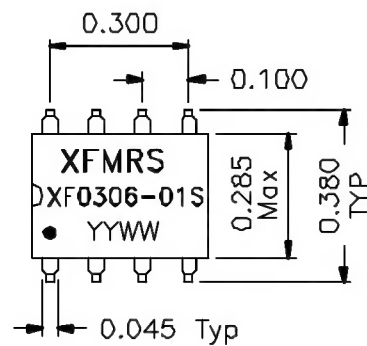


1. Dimensions:



SUGGESTED FOOTPRINT

2. Schematic:



3. Electrical Specifications:

Isolation Voltage: 500 VAC (WINDING TO WINDING)

Turns Ratio: 1:1:1:1


OCL: 30uH Minimum @100KHz 100mV (EACH WINDING)

DC Resistance: 0.25 Ohms TYPICAL

PIN1-8 LL: 0.2uH Max @100KHz 100mV

OTHER WINDINGS SHORTED

Cw/w: 20pF Maximum @100KHz 100mV (Winding TO Winding)

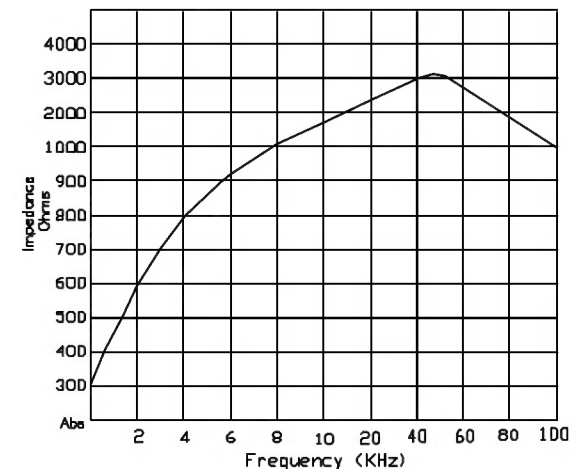

DOC. REV C/2

XFMRS Inc.		Title: COMMON MODE CHOKE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0306-01S		REV. C
	DWN.	廖玉坤	Aug-10-99
	CHK.	李清儿	Aug-10-99
	APP.	Joe Huff	Aug-10-99
SHEET 1 OF 1			